



CI/SfB

(43)P

MARCH 2007
PRODUCT DATA SHEET

ARDEX R 80 P

Heavy Duty Polyurethane Screed

HIGH PERFORMANCE, POLYURETHANE RESIN FLOORING SYSTEM, SUPPLIED AS FOUR COMPONENTS IN PRE-MEASURED PACKS FOR EASE OF ON SITE MIXING AND USE. THE CURED SYSTEM FORMS A TOUGH, EASILY CLEANED, PIGMENTED LAYER FROM 6MM UP TO 12MM THICK.

Features

Hard wearing - extremely durable and abrasion resistant with low maintenance costs

Resistant to a wide range of chemicals and liquids

Independently tested - suitable for use in food and drinks production environments

Seamless - easily cleaned to maintain high standards of hygiene


Resistant to thermal shock - at 9mm thick can withstand steam cleaning regimes

Available in a range of colours

FeRFA Classification - Type 8



Type 8

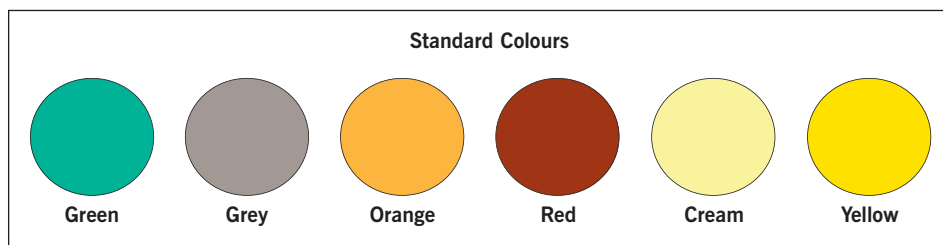

Due to printing process, colours can only be approximate



Reg No. FM 1207

ARDEX UK LIMITED
Homefield Road, Haverhill, Suffolk CB9 8QP UK.
Telephone: +44 (0)1440 714939
Fax: +44 (0)1440 716660
Technical Services Fax: +44 (0)1440 716640
Email: technical.services@ardex.co.uk
ARDEX online: www.ardex.co.uk

ARDEX R 80 P

Heavy Duty Polyurethane Screed

HIGH PERFORMANCE, POLYURETHANE RESIN FLOORING SYSTEM, SUPPLIED AS FOUR COMPONENTS IN PRE-MEASURED PACKS FOR EASE OF ON SITE MIXING AND USE. THE CURED SYSTEM FORMS A TOUGH, EASILY CLEANED, PIGMENTED LAYER FROM 6MM UP TO 12MM THICK.

DESCRIPTION

Specialist applied, polyurethane resin floor finish, combining outstanding wearing properties with high chemical resistance and decorative properties. Ideally suited to aggressive areas where a seamless, joint free finish is required and maximum cleanliness is essential. Food processing and storage, abattoirs, drinks production, dairies and general heavy duty plant and traffic areas are just some of the environments that can benefit from this slip resistant system.

SUBSTRATE PREPARATION

The concrete or screed substrate must be hard, sound and free of dust and other barrier materials such as paint, lime coatings, plaster, curing agents, laitance, adhesive residues etc., that will inhibit adhesion to the substrate.

Use ARDEX DGR to remove polish, wax, grease, oil and similar contaminating substances prior to mechanical preparation. Contaminated concrete surfaces should be mechanically prepared, either by scabbling, grinding or contained shot blasting equipment or similar, and be vacuumed clean prior to applying ARDEX R 80 P Heavy Duty Polyurethane Screed. Overwatered or otherwise weak concrete surfaces must also be suitably prepared down to sound, solid concrete by mechanical methods. Dust and other debris should be removed using vacuum equipment.

NOTE: Any joints or cracks in the concrete base where differential movement is anticipated e.g. movement joints, should be brought through to the finished surface and suitably sealed. New concrete slabs must be allowed to cure for at least 14 days.

To ensure maximum bond, grooves must be cut into the perimeter of the sub-floor, typically 8mm deep by 8mm wide. These should be inset approximately 100mm from and running parallel with the walls and adjacent to doorways and plinths etc., including any finishing edges and day joints. The grooves must have clean, square edges and the product laid into the full depth of the groove forming a perimeter anchorage. Grooves should surround areas not exceeding 20m².

STEEL PLATES

Steel decking must be clean, sound and properly supported to prevent flexing. Deck plate of less than 4mm thick is not recommended. Surfaces should be shot blasted to SA2.5 and primed using ARDEX R 3 E Solvent Free Epoxy Primer.

PRIMING

All appropriate substrates to receive ARDEX R 80 P Heavy Duty Polyurethane Screed must first be primed with ARDEX R 3 E Solvent Free Epoxy Primer. One or more coats of primer may be required depending upon the condition and porosity of the concrete substrate. The final coat of flooring primer must be seeded with ARDEX Fine Aggregate to provide a mechanical key.

MIXING

Part A and Part B Resin Components of ARDEX R 80 P Heavy Duty Polyurethane Screed must first be mixed together for 1 minute, using forced action, in a suitably sized mixing vessel. The contents of Part C, the powder component and pigment sachet should then be introduced into the mixed resin and mixed together for a further 2 minutes to create one homogeneous mix. One or more packs may be mixed at the same time in order to maintain a quick rate of installation.

APPLICATION

The mixed material should be applied to the prepared and primed substrate without delay using a trowel to achieve the desired thickness. As soon as the product has been laid and as work progresses, the surface should be gently rolled with a short piled roller in order to provide an even surface appearance. Do not re-roll later. The work area should be

protected during the installation process and during the initial curing time to ensure that no airborne debris can contaminate the surface of the wet resin as this will lead to unwanted blemishes in the hardened, cured surface.

All movement joints in the sub-floor must be carried through the topping and properly sealed. Construction joints and cracks not subject to movement may be overlaid but should the floor move in any way, these defects will reflect through the system. Isolation joints will need to be allowed for in areas where high thermal movement is anticipated, e.g. around ovens and freezers.

LIMITATIONS

ARDEX R 80 P Heavy Duty Polyurethane Screed should only be applied at temperatures above 5°C and where the atmospheric relative humidity (RH) is 90% or below. Floors should have a RH of 75% or less. For floors with an RH of more than 75%, the entire floor area should be treated with ARDEX DPM Surface Damp Proof Membrane applied and seeded with ARDEX Fine Aggregate, in accordance with the current product data sheet, in place of ARDEX R 3 E Solvent Free Epoxy Primer.

The substrate should have a surface tensile strength of at least 1.5 N/mm². ARDEX R 80 P Heavy Duty Polyurethane Screed and primer/DPM may be applied to substrates of a lower strength, but long-term performance may be impaired. Once the mixed material has exceeded its pot life, the viscosity and the characteristics of the product will change and any unused product should be discarded at this time.

CLEANING TOOLS

ARDEX R 80 P Heavy Duty Polyurethane Screed can be removed from tools and equipment by using ARDEX RTC Tool Cleaner, immediately after use. Any hardened material will need to be removed mechanically.

PROPERTIES

The values shown are typical of results obtained in the laboratory at 20°C. Actual performance values obtained on site may vary from those quoted.

Physical properties	@ 20°C Approximately
Working life	15 mins
Light traffic	24hrs
Full traffic	48hrs
Full chemical cure	7 days
Bond strength	> 1.5 N/mm ²
Compressive strength:	52 N/mm ²
Flexural strength:	14 N/mm ²
Tensile strength:	6 N/mm ²
Abrasion resistance:	Classified 'Special Duty' under BS 8204: Part 2: 2002
Slip resistance:	Classified 'Satisfactory' under BS 8204: Part 2: 2002, wet and dry
Impact resistance:	Classified 'High Impact Resistance' under BS 8204: Part 1: 1999
Water absorption: (Hygiene of foodstuffs 93/43/EFC)	0
Sensory evaluation: (C+C FRA method TFS-5-002)	No taint

COLOURS

ARDEX R 80 P is available in six standard colours: green, grey, orange, red, cream and yellow. Other colours may be available to special order, subject to quantity and technical requirements.

ARDEX polyurethane floor systems are formulated to maximise the mechanical and chemical resistance properties, as a result of this, these types of systems are discoloured by ultraviolet light leading to a

"yellowing effect". This yellowing effect is dependent upon the amount of UV exposure, both in terms of intensity and time, and is more noticeable with lighter colours.

CHEMICAL RESISTANCE

ARDEX R 80 P Heavy Duty Polyurethane Screed is resistant to a wide range of liquids and chemicals, for specific information please refer to the ARDEX Technical Services Department.

MAINTENANCE

For information on cleaning and maintenance regimes please refer to the Priming, Preparation, Cleaning and Maintenance for ARDEX Industrial Flooring Products leaflet.

COVERAGE

A 30.7kg pack of ARDEX R 80 P Heavy Duty Polyurethane Screed will cover approximately 2.4m² when applied at a thickness of 6mm and 1.6m² at a thickness of 9mm.

NOTE: These figures are theoretical, due to wastage and the variety and nature of substrates practical coverage figures may be reduced.

PACKAGING

ARDEX R 80 P is packed in a four component pack consisting of parts A (resin) and B (hardener) packed in plastic bottles, part C (filler) packed in a bag, plus a sachet of pigment appropriate to product colour.

STORAGE AND SHELF LIFE

Store in dry conditions between 5°C and 30°C, protect from frost and direct sunlight. Storage life not less than 6 months in the original unopened packaging.

PRECAUTIONS

During mixing and application the following precautions should be observed: ensure adequate ventilation and avoid contact of the material with the eyes, nasal passages, mouth and unprotected skin. Avoid contact with the hands by wearing protective gloves and by using, if necessary, a suitable barrier cream.

In case of contact with the eyes, rinse immediately with plenty of water and seek medical advice and after contact with the skin wash immediately with plenty of soap and water (do not use solvents). Prolonged contact with the skin should be avoided, especially where the user has an allergic reaction to resin-based materials. Always wear gloves and eye/face protection as necessary. Observe personal hygiene, particularly washing the hands after work has been completed or at any interruption whilst work is in progress. Care should be taken when removing gloves to avoid contaminating the insides. In case of accidents seek medical advice.

DISPOSAL/SPILLAGE

Spillage of any of the component products should be absorbed onto sand or other inert material and transferred to a suitable disposable vessel. Disposal of such spillage or empty packaging should be in accordance with local waste disposal authority regulations.

For further information please refer to the Safety Data Sheet.

NOTE: The information supplied in our literature or given by our employees is based upon extensive experience and, together with that supplied by our agents or distributors, is given in good faith in order to help you. Our Company policy is one of continuous Research and Development; we therefore reserve the right to update this information at any time without prior notice. We also guarantee the consistent high quality of our products; however, as we have no control over site conditions or the execution of the work, we accept no liability for any loss or damage which may arise as a result thereof.

Country specific recommendations, depending on local standards, codes of practice, building regulations or industry guidelines, may affect specific installation recommendations.